

K4LED

Georgia Amateur Radio Astronomy Observatory

Observation Date: 06-19-2018, 0:00:00 to 23:59:00 UTC

Location: Lat. 34.42322 N, Lon. -84.49413 W (Jasper, GA 30143)



Object: TP, GB

Observer: Larry E. Dodd


Receivers: FSX11, SDRPlay2PRO, RJ1.1

Software: SkypipeII 2.7.34, Spectrograph 2.8.50

Antennas: Radio Jove Dual Dipole Kit, Typinski Square TFD

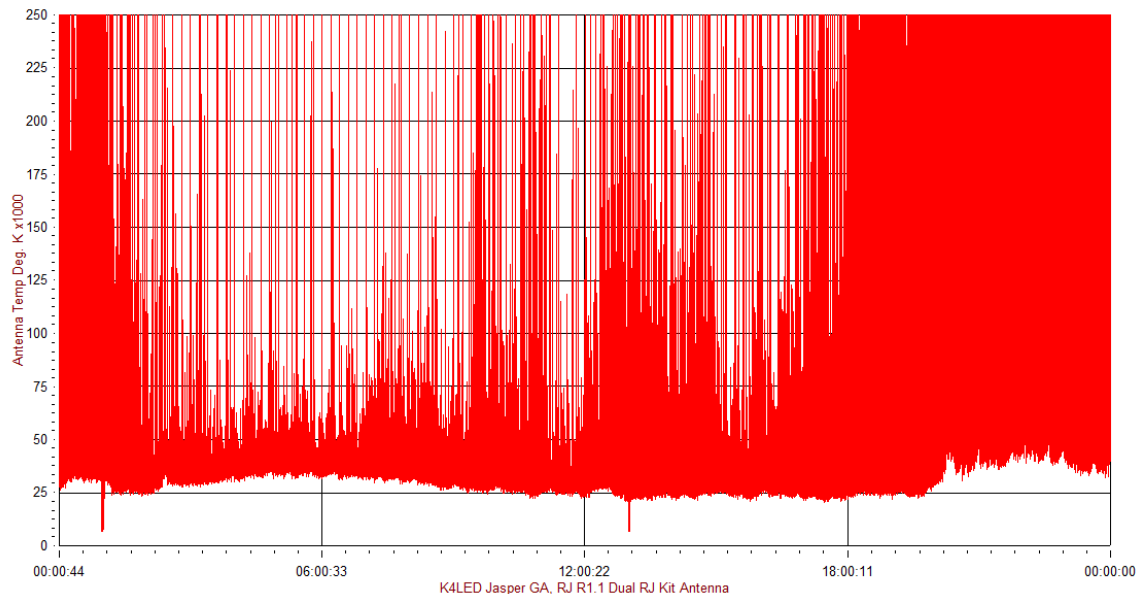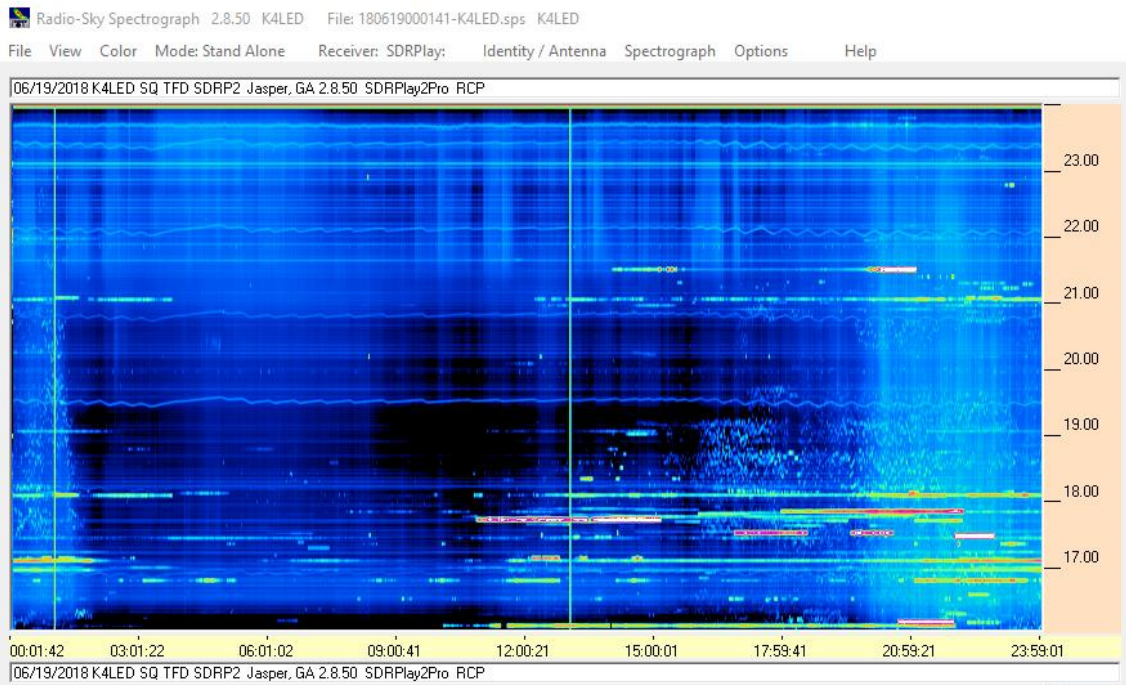


06/19/2018 K4LED SQ TFD SDRP2 Jasper, GA 2.8.50 SDRPlay2Pro RCP

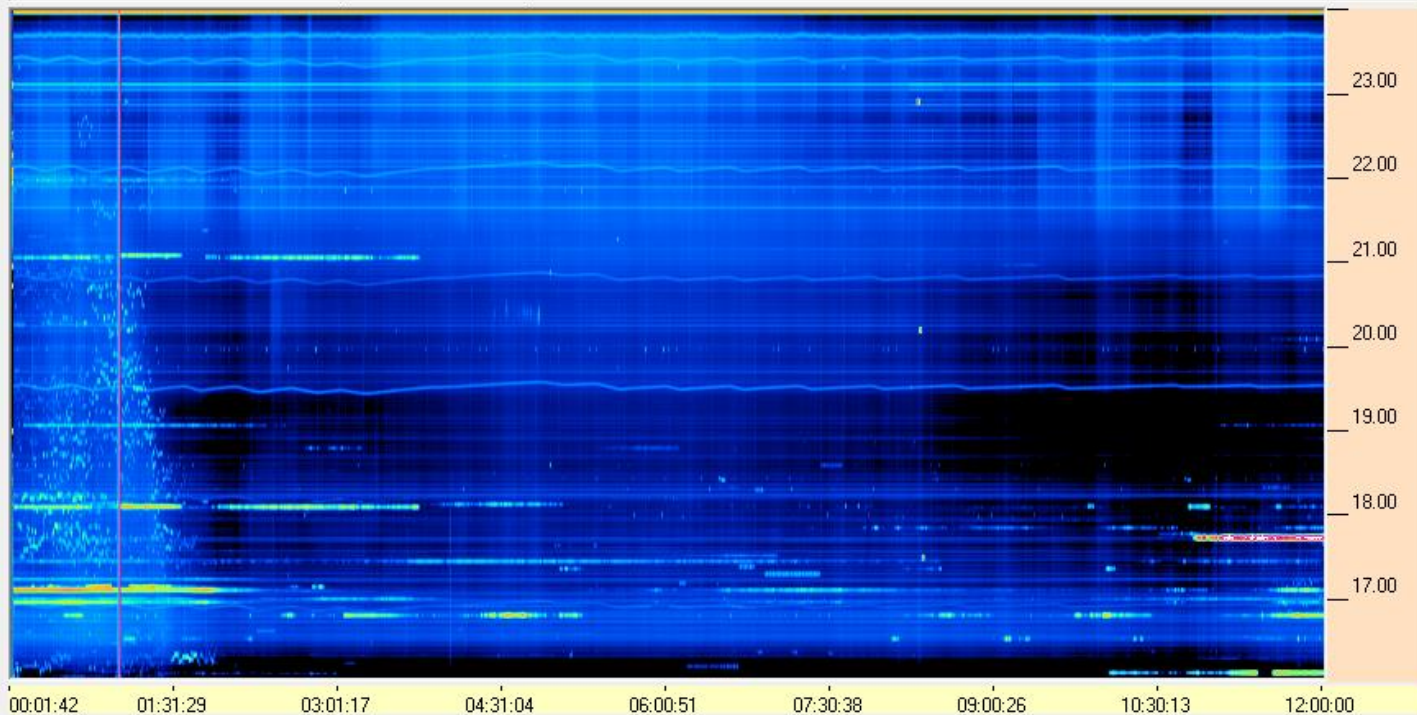

06/19/2018 K4LED SQ TFD SDRP2 Jasper, GA 2.8.50 SDRPlay2Pro RCP

06/19/2018 K4LED SQ TFD SDRP2 Jasper, GA 2.8.50 SDRPlay2Pro RCP

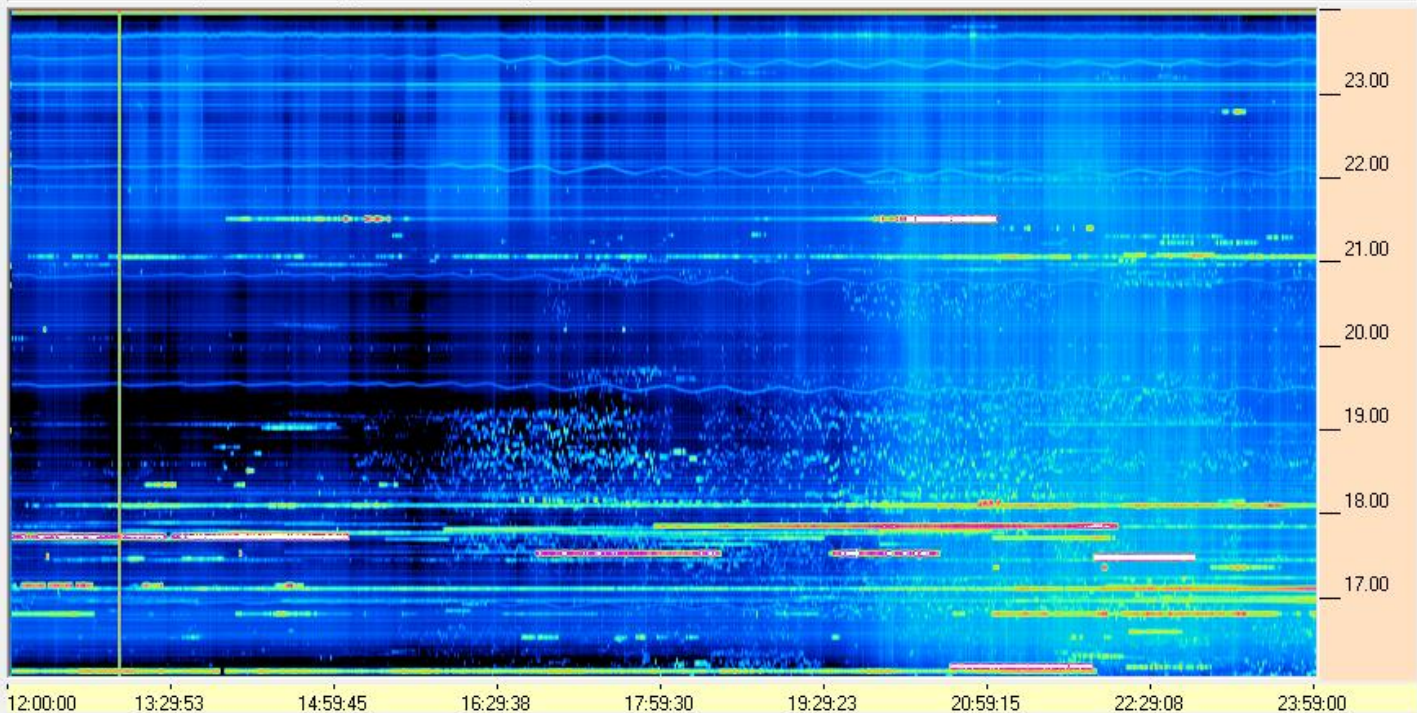


06/19/2018 K4LED SQ TFD SDRP2 Jasper, GA 2.8.50 SDRPlay2Pro RCP



Station YYYY DAY DDD HHMMSS P1 FFS S AXN PPS IGA PS
Eglin AFB 2018 Jun19 170 120000 RSF 1 713 100 03+ 79

foF2	4.300
foF1	2.91
foF1p	N/A
foE	2.28
foEp	2.24
fxI	4.90
foEs	2.73
fmin	1.00
MUF(D)	15.30
M(D)	3.56
D	N/A
h`F	232.5
h`F2	277.5
h`E	82.0
h`Es	95.0
hmF2	211.8
hmF1	149.0
hmE	87.4
yF2	50.8
yF1	26.8
yE	5.4
B0	97.2
B1	1.15
C-level	44

Auto:
Artist5
500200

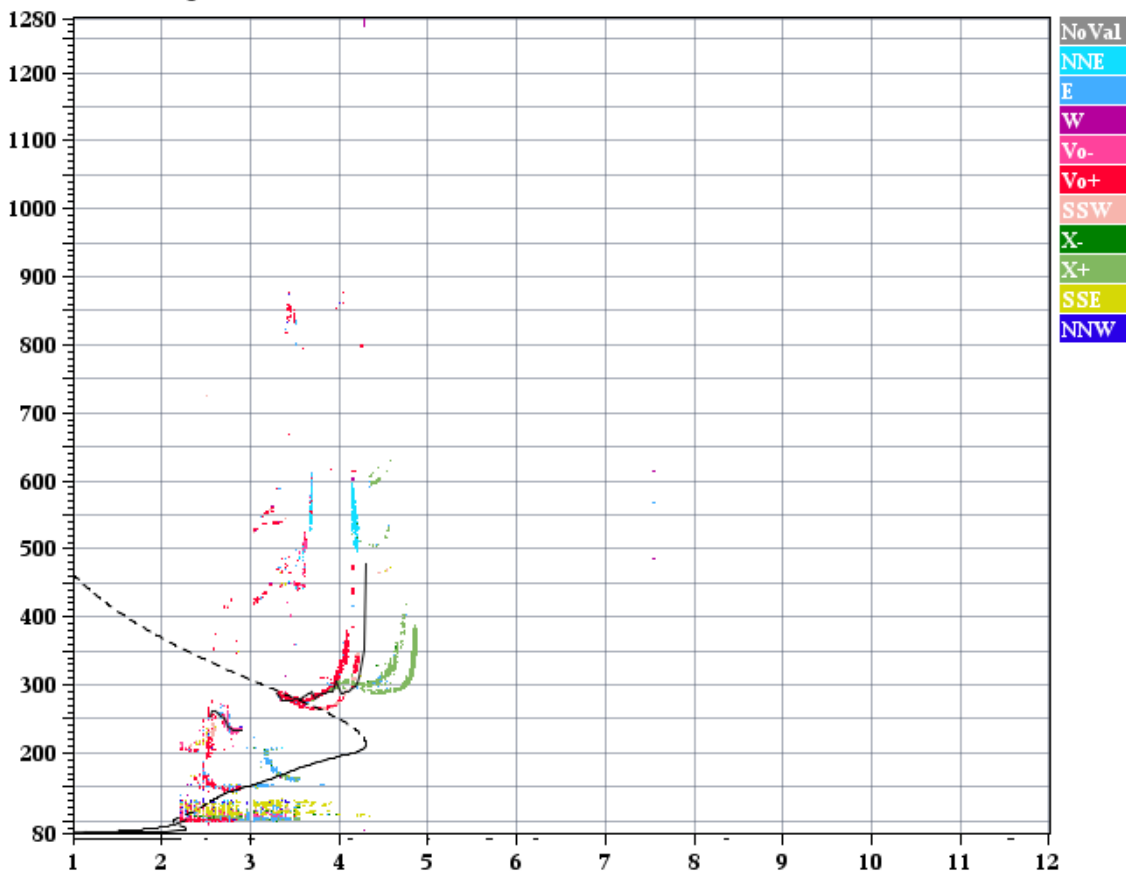

D 100 200 400 600 800 1000 1500 3000 [km]
MUF 4.9 5.0 5.2 5.6 6.1 6.9 9.3 15.3 [MHz]
16770413.tmp / 440fx512h 25 kHz 2.5 km / DPS-4D EG931 084 / 30.5 N 273.5 E

ShowIonogram v 1.0

References for Interpreting the Ionogram:


http://www.sws.bom.gov.au/IPSHosted/INAG/uag_23a/UAG_23A_indexed.pdf

<http://citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.404.5517&rep=rep1&type=pdf>



<https://www.hfunderground.com/wiki/index.php/Ionosonde>

Ionosphere Layers, MUF, Total Electron Content

MUF TEC E, F1, F2 Max Height 2018-06-20 00:25

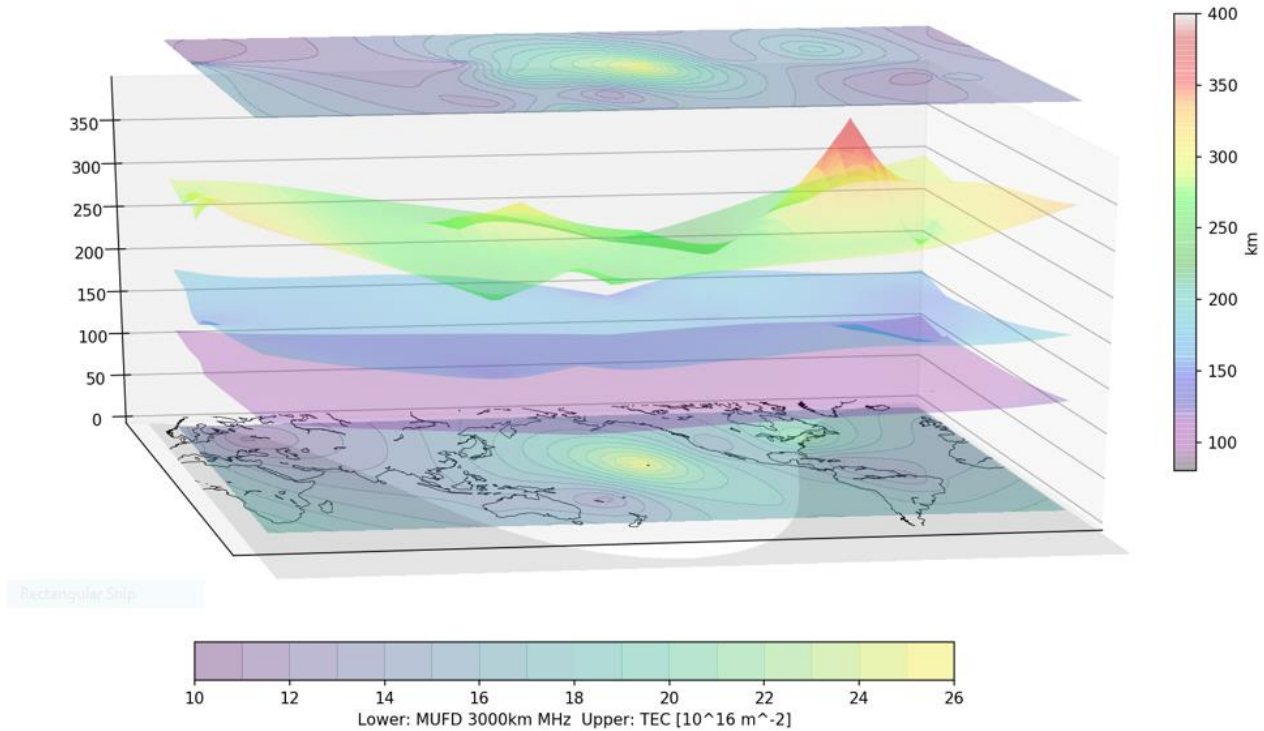

Data Global Ionospheric Radio Observatory (GIRO) Principal Investigator Prof. B. W. Reinisch UMass Lowell

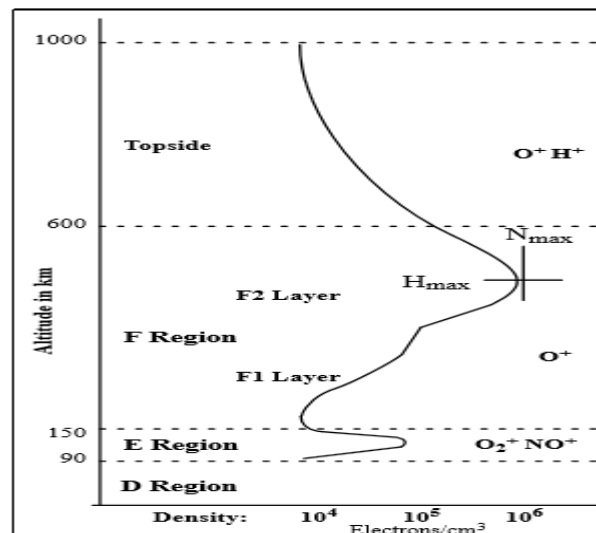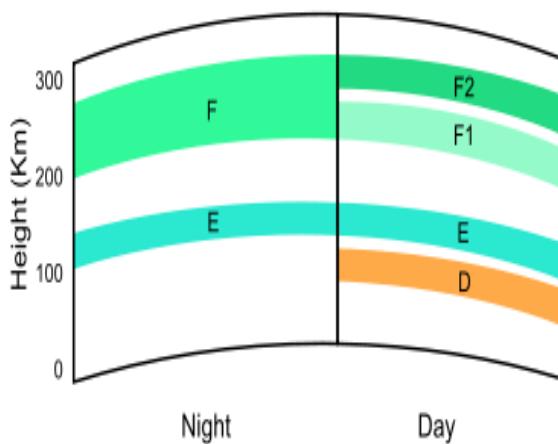

The **critical frequency** is the limiting frequency at or below which a radio wave is reflected by an ionospheric layer at vertical **incidence**. If the transmitted frequency is higher than the **plasma frequency** of the ionosphere, then the electrons cannot respond fast enough, and they are not able to re-radiate the signal. It is calculated as shown below:

$$f_{\text{critical}} = 9 \times \sqrt{N}$$




where N = electron density per m^3 and f_{critical} is in Hz.

The Maximum Usable Frequency (MUF) is defined as the upper frequency limit that can be used for transmission between two points at a specified time.

$$f_{\text{muf}} = \frac{f_{\text{critical}}}{\sin \alpha}$$

where α = **angle of attack**, the angle of the wave relative to the **horizon**, and sin is the **sine** function.

Reference: <https://en.wikipedia.org/wiki/Ionosphere>

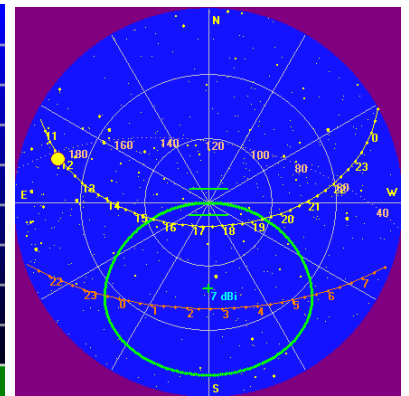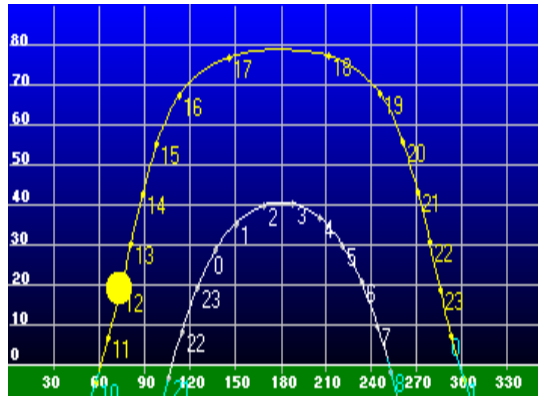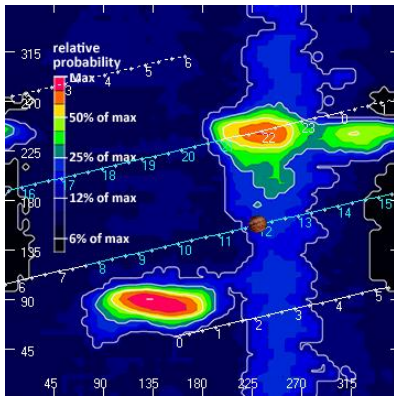

Radio-Jupiter Pro 3.8.2 (GMT)

File Options Display Tools Window Help

YYYY MM DD
 Date 2018 06 19 cal


HH MM SS
 Time 12 00 00 GMT

Using Fixed Time

Lat: 34:25:23.5
 Long: 84:29:38.8 W

Jupiter		Sun	
ALT: -50.2	ALT: 18.6		
AZ: 289.6	AZ: 073.9		
HA: -14:34	HA: -05:31		
Rise: 21:18	Rise: 10:24		
Set: 07:54	Set: 00:42		
RA: 14:47	RA: 05:44		
DEC: -14:53	DEC: 23:23		
CMIII: 230.94			
Io SGC: 157.90			
	LMST: 00:12:42		

AUTOMATED CALIBRATION COLOR BAR TEST PATTERN AND DATA ACTUAL MEASURED DATA

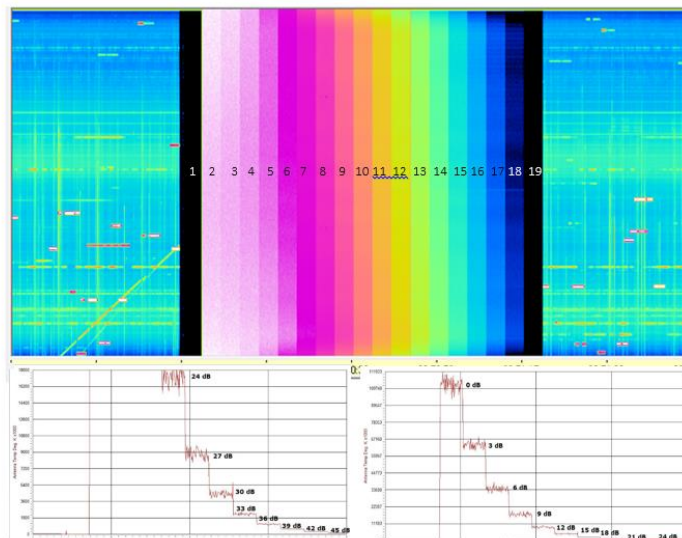

STEP	TEMPERATURE	ATTENUATION
1	>1 kK	101 dB
2	104.0 MK	0 dB
3	66.9 MK	3 dB
4	36.3 MK	6 dB
5	19.1 MK	9 dB
6	9.6 MK	12 dB
7	4.5 MK	15 dB
8	2.3 MK	18 dB
9	1.2 MK	21 dB
10	602.0 kK	24 dB
11	296.6 kK	27 dB
12	133.0 kK	30 dB
13	92.2 kK	33 dB
14	51.6 kK	36 dB
15	32.0 kK	39 dB
16	22.6 kK	42 dB
17	17.9 kK	45 dB
18	12.0 kK	48 dB
19	>1 kK	101 dB